


**PLAN VIEW**

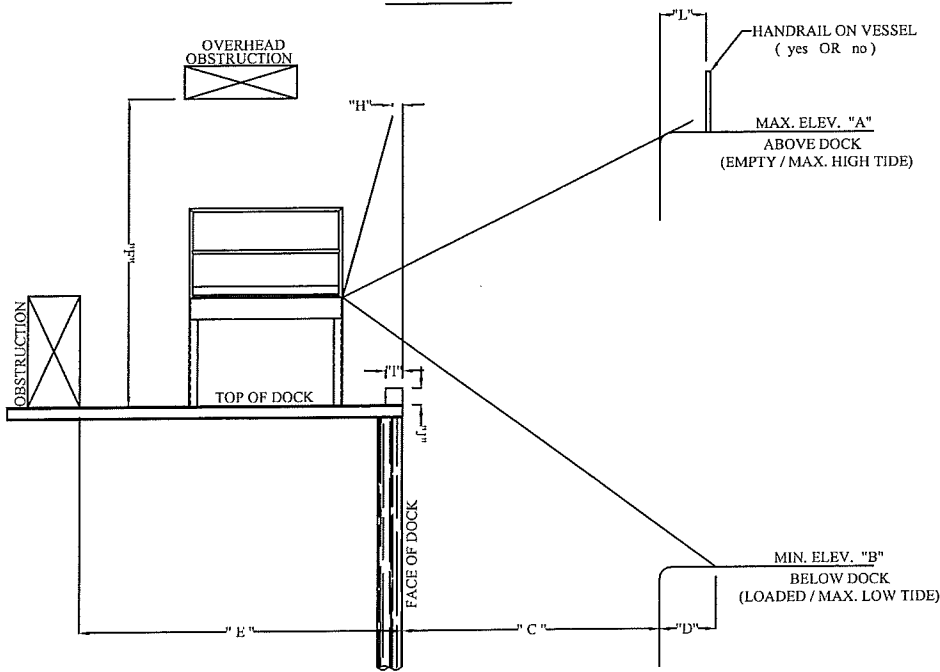

**ELEVATION VIEW**

- A - MAX. ELEV. OF BARGE ABOVE DOCK (I.E. EMPTY BARGE @ HIGH TIDE)
- B - MIN. ELEV. OF BARGE BELOW DOCK (I.E. FULL BARGE @ LOW TIDE)
- C - DISTANCE FROM FACE OF DOCK TO FACE OF BARGE.
- D - MAX. DISTANCE BARGE MAY DRIFT OUT WHILE BARGE IS DOCKED.
- E - MAX. DEPTH ALLOWED FOR STRUCTURE ON DOCK.
- F - HEIGHT OF OVERHEAD OBSTRUCTIONS (IF ANY).
- G - WIDTH ALLOWED FOR STRUCTURE ON DOCK.
- H - DISTANCE FROM FACE OF DOCK REQUIRED FOR GANGWAY TO BE STORED FOR PROPER CLEARANCE - IF APPLICABLE.
- I - WIDTH OF CURB (IF ANY)
- J - HEIGHT OF CURB (IF ANY)
- K - MAX. DISTANCE GANGWAY MAY EXTEND ON TO BARGE.
- L - DISTANCE FROM EDGE OF BARGE TO HANDRAIL

A -	_____
B -	_____
C -	_____
D -	_____
E -	_____
F -	_____
G -	_____
H -	_____
I -	_____
J -	_____
K -	_____
L -	_____

**GANGWAY TYPE**

- STAGE
- SLT
- OTHER \_\_\_\_\_

**MATERIAL TYP(GANGWAY)**

- ALUMINUM
- POWDER COAT (ALUM or STEEL)
- OTHER \_\_\_\_\_

**MOUNT INFO**

- FLUSH
- TRACKING
- PIVOTING

**POWER REQUIREMENTS**

- SPRING
- PNEUMATIC (\_\_\_\_ PSI @ DOCK)
- HYDRAULIC
- CLASS \_\_\_\_ DIV. \_\_\_\_ GROUP \_\_\_\_\_ (IF REQUIRED)

**GANGWAY WIDTH**

- 24
- 36
- 48
- OTHER \_\_\_\_\_

**WALK SURFACE TYPE(GANGWAY)**

- DECK SPAN
- CURVED TREADS
- OTHER \_\_\_\_\_

**BARGE INFO**

- RIBS
- FLAT